


版本	变更原因	日期	姓名

Diagram

Pin No.	Symbol
1	YU
2	XL
3	YD
4	XR

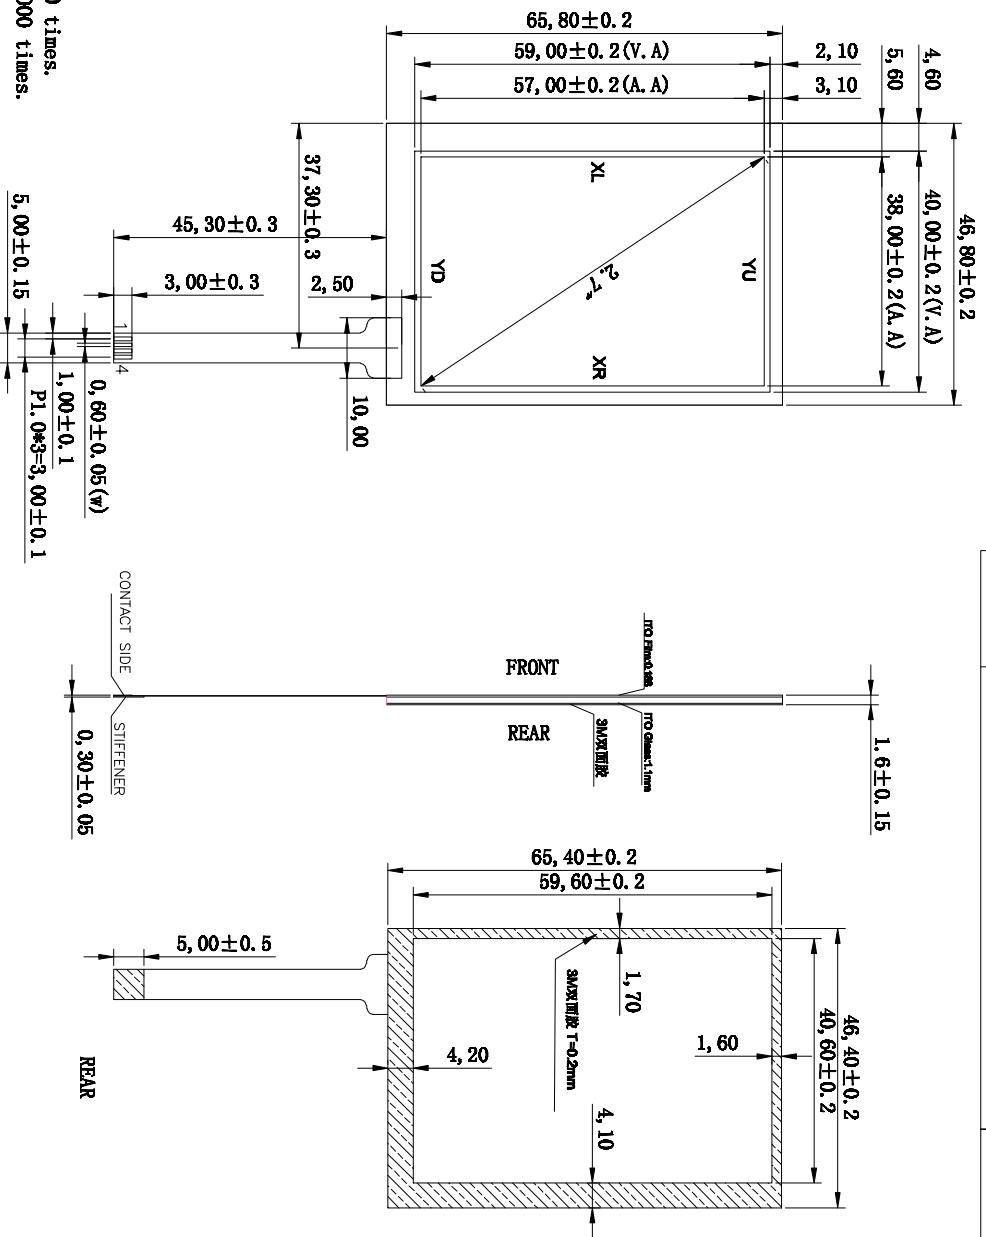

- NOTES:
1. Type: Film to Glass, anti-glare
 1. Operation Temperature: -20°C ~ +70°C.
 - Storage Temperature: -30°C ~ +80°C.
 2. Life Time (Tapping durability): >1,000,000 times.
 - Life Time (Pen sliding durability): >100,000 times.
 3. Linearity: ≤1.5%
 4. TOP ITO Film: Anti-Glare film
 - Loop Resistance: 100 < X < 400 ; 450 < Y < 950 ;
 5. Unspecified Tolerance: ±0.20
 6. Tail type: FPC with golden plated
 7. Transmittance: ≥78%
 - Surface headness: 3H Chattering time: ≤10ms
 8. ROHS
 9. Neutral product
 10. FPC 镀金压延铜

1000~X<2000MM >2000MM
 1200~X<5120MM 41.20MM
 800~X<5120MM 40.50MM
 400~X<500MM 40.40MM
 120~X<540MM 40.20MM
 30~X<5120MM 40.10MM



Shenzhen GreenTouch Technology Co., Ltd

Model No.:	GT-4W-27B-1	Size	2.7"	Ratio	1:1
Structure	G+T	Unit	mm	Scale	1:1
Design	Mr. Li	Date	2016.8.23	Page	1/1
Check	Pay for wei	Date	2016.8.23	Version	A0
Release	Wang Chen	Date	2016.8.23		